

40 GPM: D40MZ3000

PRODUCT DESCRIPTION

The Dosatron **D40MZ3000**, with flow up to 40 GPM, can be installed in parallel to increase the water flow. It's water-powered so no electricity is needed, and it's easy to install and maintain. 63% fewer parts, metal free piston.

PRODUCT SPECIFICATIONS

Dilution Range:	1:3000 to 1:500 (0.03% to 0.2%)
Water Flow Range:	2.2 to 40 GPM
Operating Pressure Range:	4.35 to 116 PSI
Available Housing Materials:	Polypropylene (Standard Blue)
Dimensions:	25 1/4" x 8 1/2"
Weight:	12 lbs
Connection Size:	1 1/2" NPT
Maximum Temperature:	104 ⁰ F
Included Accessories:	6' clear suction tube, weighted strainer, mounting bracket and operating manual
Recommended Accessories:	200 mesh filter, check valve
Optional Accessories:	Bypass, part #: MPDI196




MAINTENANCE KITS

Mini-Maintenance Kit (Part#: PJDI216MINI) - For regular maintenance Injection Seal Kit (Part#: PJDI216) - For yearly maintenance



40 GPM: D40MZ3000

Recommended Basic Installation

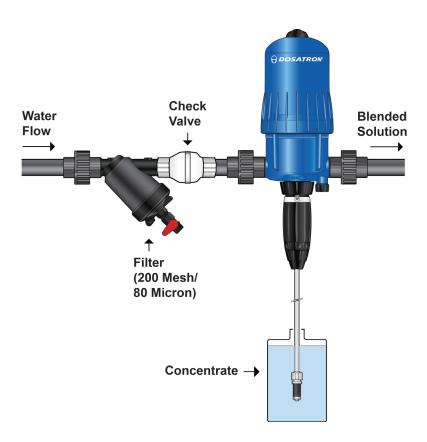

Dosatron International 2090 Sunnydale Blvd. • Clearwater, FL, USA 800-523-8499 • www.dosatronusa.com

Dosatron International, Inc. is an industry leader in water-powered, proportional chemical injectors. Dosatron products are manufactured according to ISO 9001:2000 and ISO 14001:2004 standards.