


ASSEMBLY INSTRUCTIONS

IPK34 - 14 GPM-HTEMP Industrial Plumbing Kit

For units: D14TMZ5, D14TMZ10,
and D14TMZ3000

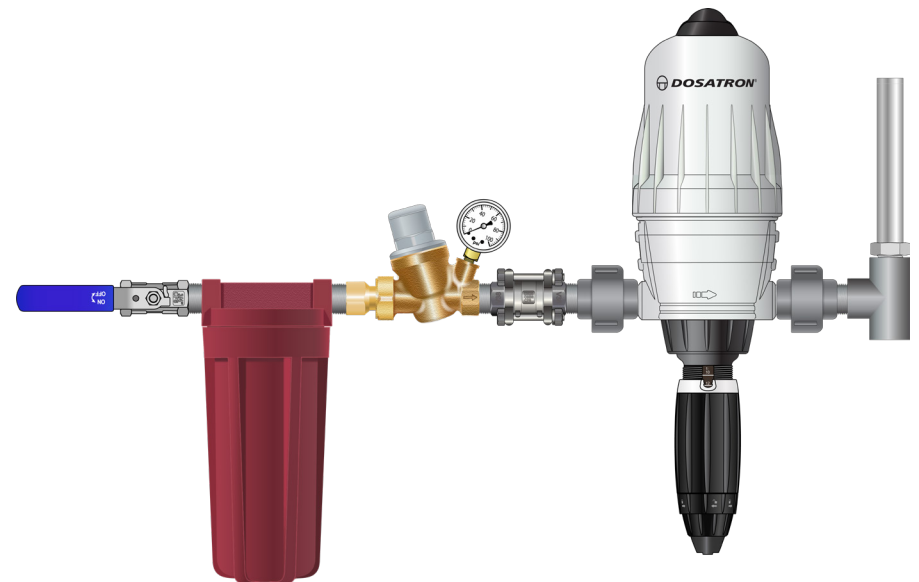

DilutionTM
SOLUTIONS
An Ingersoll Rand Business


(Dosatron unit sold separately)

2090 Sunnydale Blvd. • Clearwater, FL 33765
• 1-800-451-6628 • 1-727-451-1198 • Fax: 1-727-451-1197
www.dilutionsolutions.com

- This means the TEE head will be screwed onto the end of the water line, the water hammer device will be screwed upward into one of the TEE shoulders, and the water outlet will be downward through the second shoulder. See illustration.

Qty	IPK34 - 14 GPM-HTEMP Includes:	#
1	3/4" stainless steel ball valve	1
1	3/4" CPVC high-temp filter	2
1	3/4" brass pressure regulator w/gauge	3
1	3/4" stainless steel check valve	4
2	3/4" CPVC high-temp unions	5
1	3/4" CPVC high-temp Tee	6
1	3/4" stainless steel water-hammer arrestor	7
5	3/4" CPVC high-temp close nipples	8
1	Roll of thread seal tape	9

IPK34 - 14 GPM-HTEMP

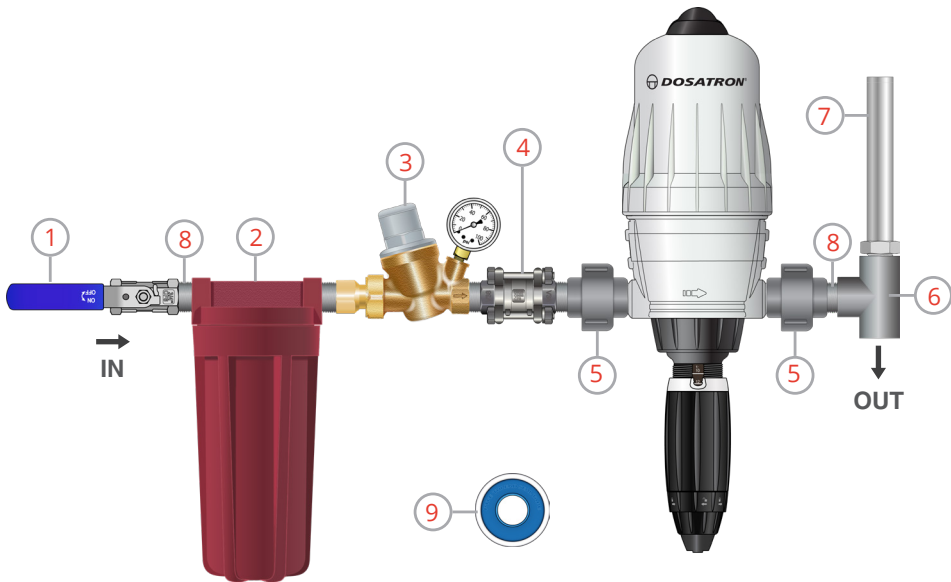

NOTE: Parts ordered, or pictured, may look slightly different than the image displayed, but the fit and function will be the same.



When connecting a DOSATRON either to the public water supply or to its own water source, you must respect the regulations in force concerning protection of the source i.e. backflow prevention, etc.