


NEW D6



DOSATRON INTERNATIONAL S.A.S
2090 Sunnydale Blvd, Clearwater, FL 33765
Tel. 1-800-523-8499
mailbox@dosatronusa.com - www.dosatron.com

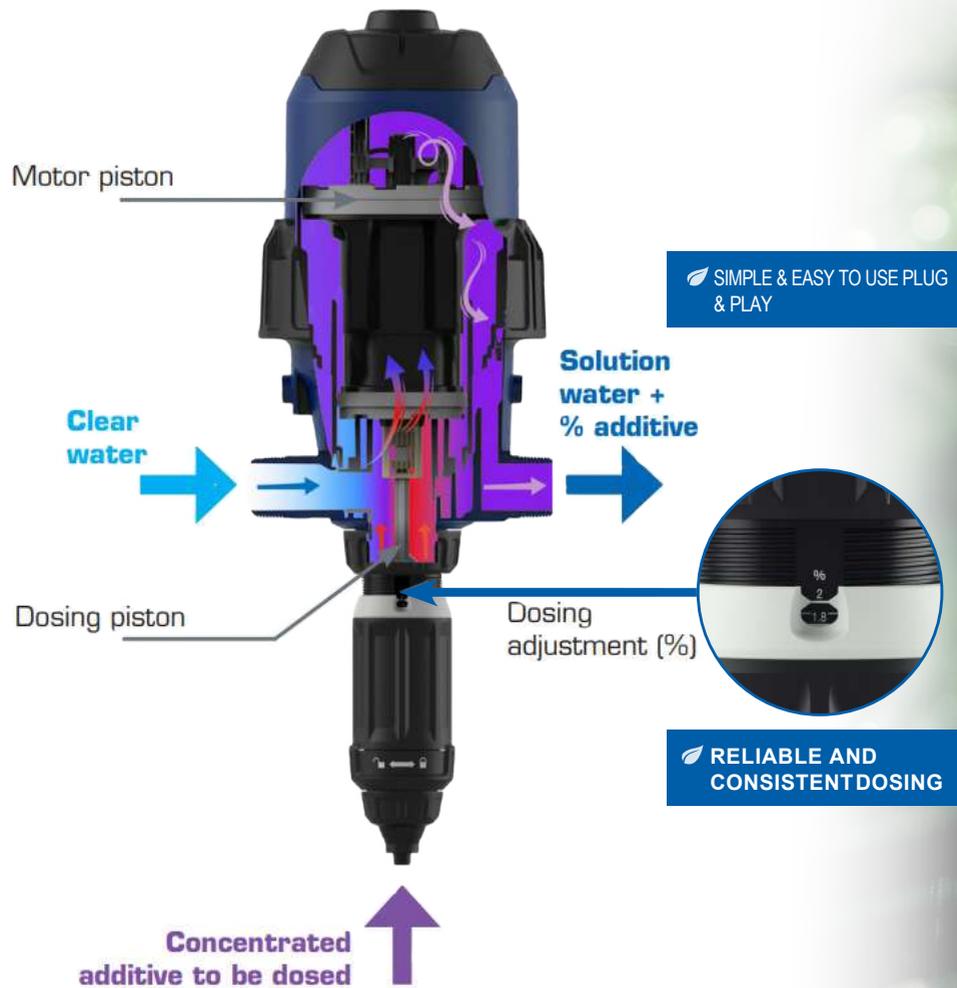

This document does not constitute a contractual obligation and is for information purposes only. DOSATRON INTERNATIONAL reserves the right to modify its devices at any time. Photo credit: ©Adobe Stock - Rathmakers. Some images have been generated by AI.

©DOSATRON INTERNATIONAL S.A.S 2024 - DDCDGL-EN_11/2024

D6

AN INNOVATION IN FERTIGATION

Our new fertilizer dosing pump, ideal for greenhouse and horticultural irrigation.



HASSLE-FREE ULTRA-HIGH PERFORMANCE

- HIGHER FLOW AND PRESSURE RATINGS
- EXTENSIVE CHEMICAL COMPATIBILITY
- ENHANCED BLENDING CAPABILITIES



THE MOTOR

- SIMPLIFIED HYDRAULICS
- REDUCED WEAR PARTS
- REPLACEABLE INTERNAL SLEEVE
- ECOFRIENDLY NO-METAL DESIGN



	D6M22
Dilution Range:	1:500 - 1:50 (0.2% to 2%)
Water Flow Range:	0.44 to 26 GPM
Operating Pressure Range:	4.3 to 116 PSI
Available Housing Materials:	• Polypropylene
Dimensions:	25" L x 9" W x 8" H
Weight:	9 lbs
Connection Size:	1 1/4" NPT
Maximum Temperature:	104° F
Included Accessories:	6' clear suction tube, strainer, weight, mounting bracket and quick start guide
Optional:	Bypass switch available



Designed for Serviceability

With its replaceable internal motor sleeve, the body, bell and retention ring of the Dosatron D6 are no longer wear items. Simply replace the internal sleeve or piston flanges when wear patterns present dosing accuracy discrepancies. Learn more in the app by scanning the QR code