DOSATRON®

WATER POWERED DOSING TECHNOLOGY

SCHEMATICS

Dosatron Liquid Dispenser

Model D132WL5000 - 132 GPM

1:5000 - 1:500

7 - 87 PSI

3” NPT Connection

Suggested Installation:
200 mesh/80 micron water filter prior to unit
One-way check valve downstream from unit for water hammer protection

Suggested Maintenance Interval:
Replace injection seals every 12 months

DOSATRON SALES & SERVICE - NORTH & CENTRAL AMERICA

Dosatron International, Inc.
Phone: 727-443-5404 Service: (800) 523-8499
Fax: 727-447-0591
www.dosatronUSA.com

D132WL5000

132 GPM - 1:5000 - 1:500
0.02% - 0.2%
7 - 87 PSI
0.5 - 6 bar

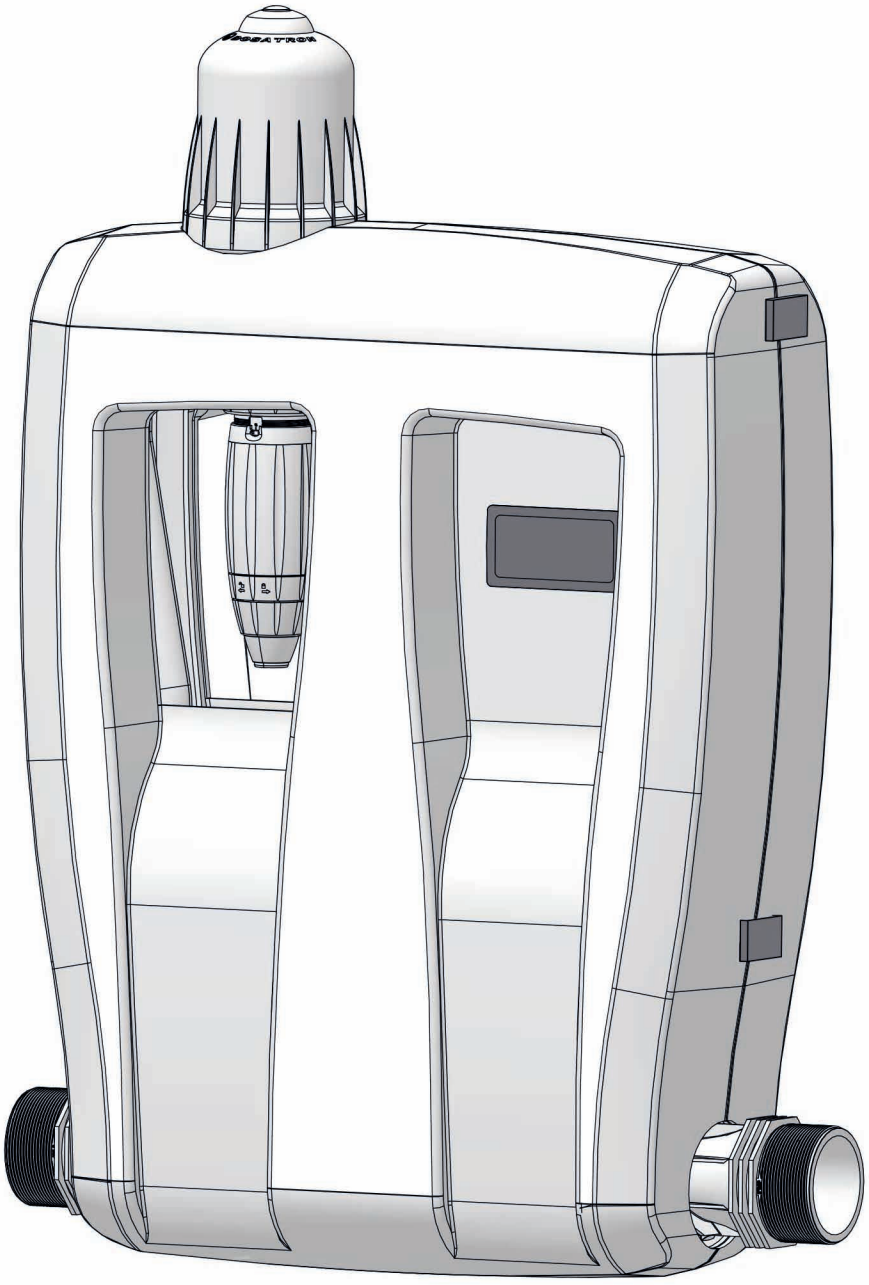

D132WL5000

132 GPM - 1:5000 - 1:500
0.02% - 0.2%
7 - 87 PSI
0.5 - 6 bar

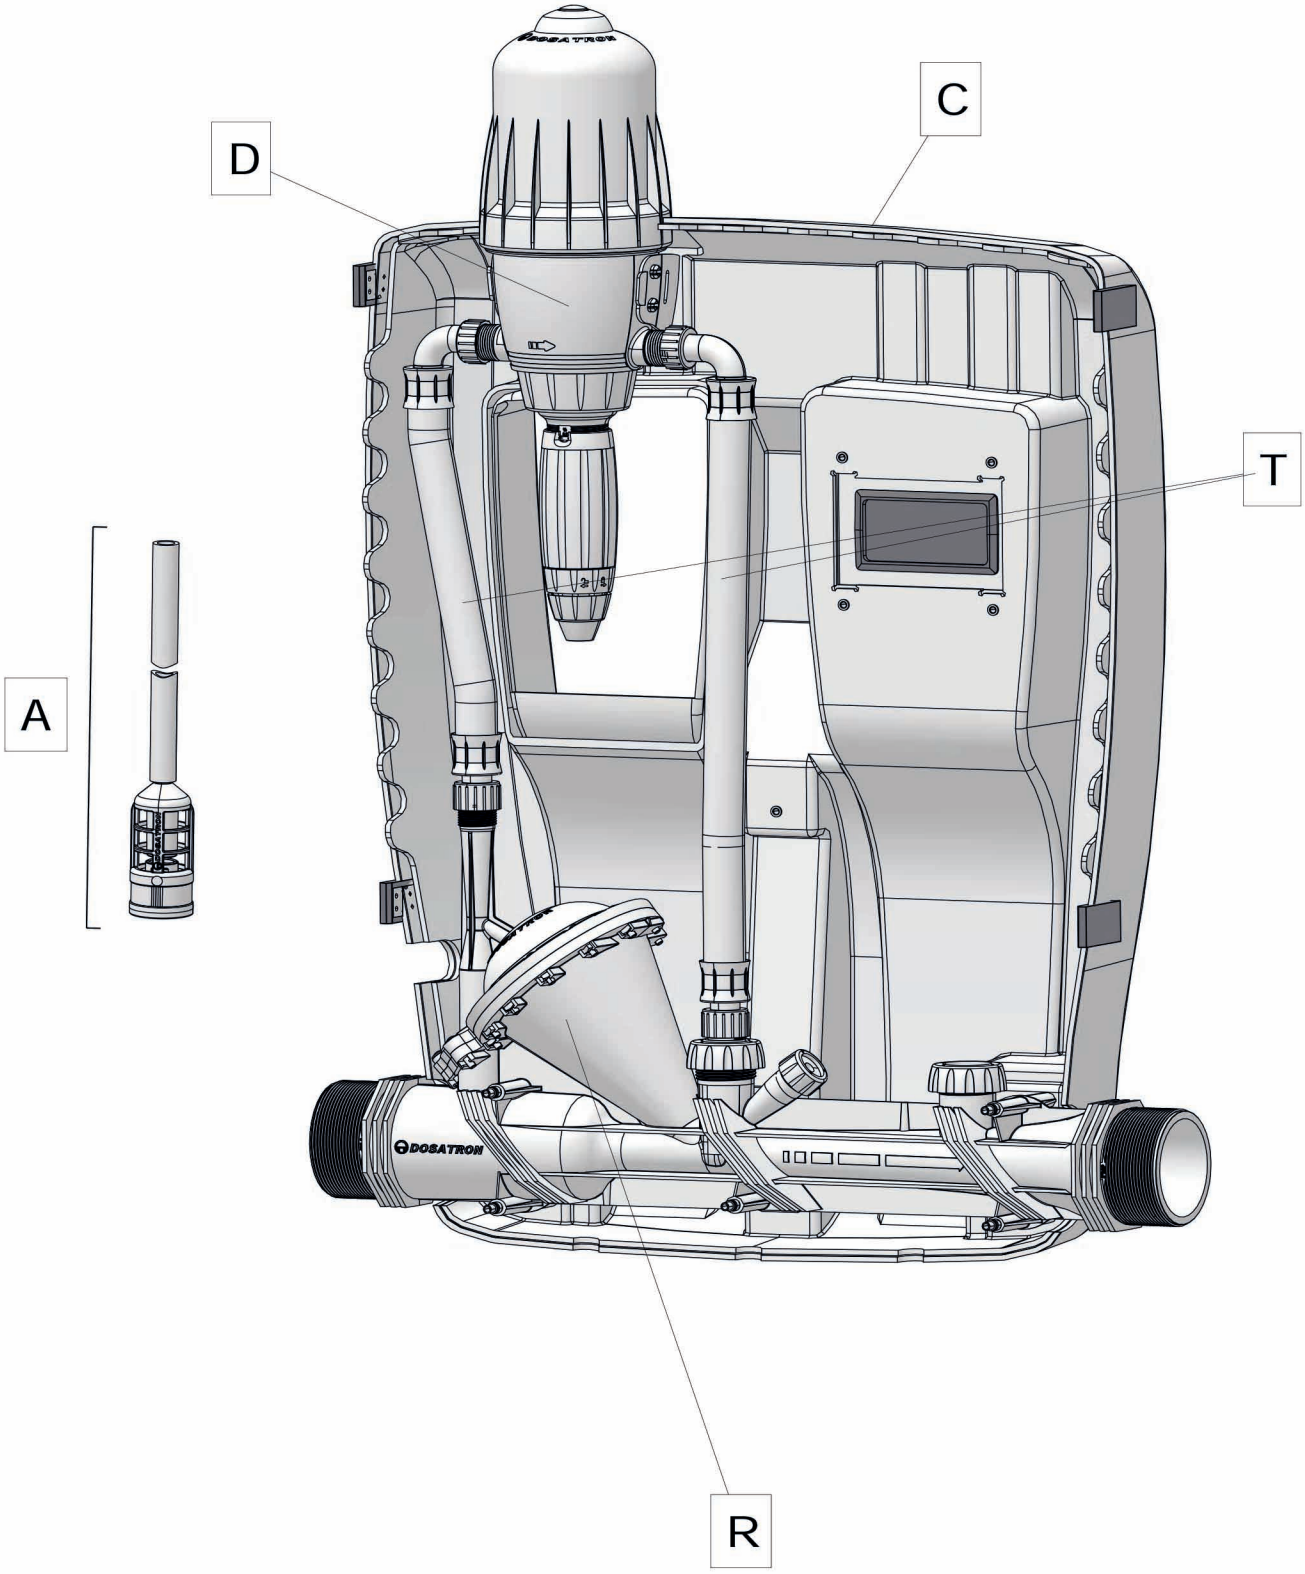

D132WL5000

132 GPM - 1:5000 - 1:500
0.02% - 0.2%
7 - 87 PSI
0.5 - 6 bar

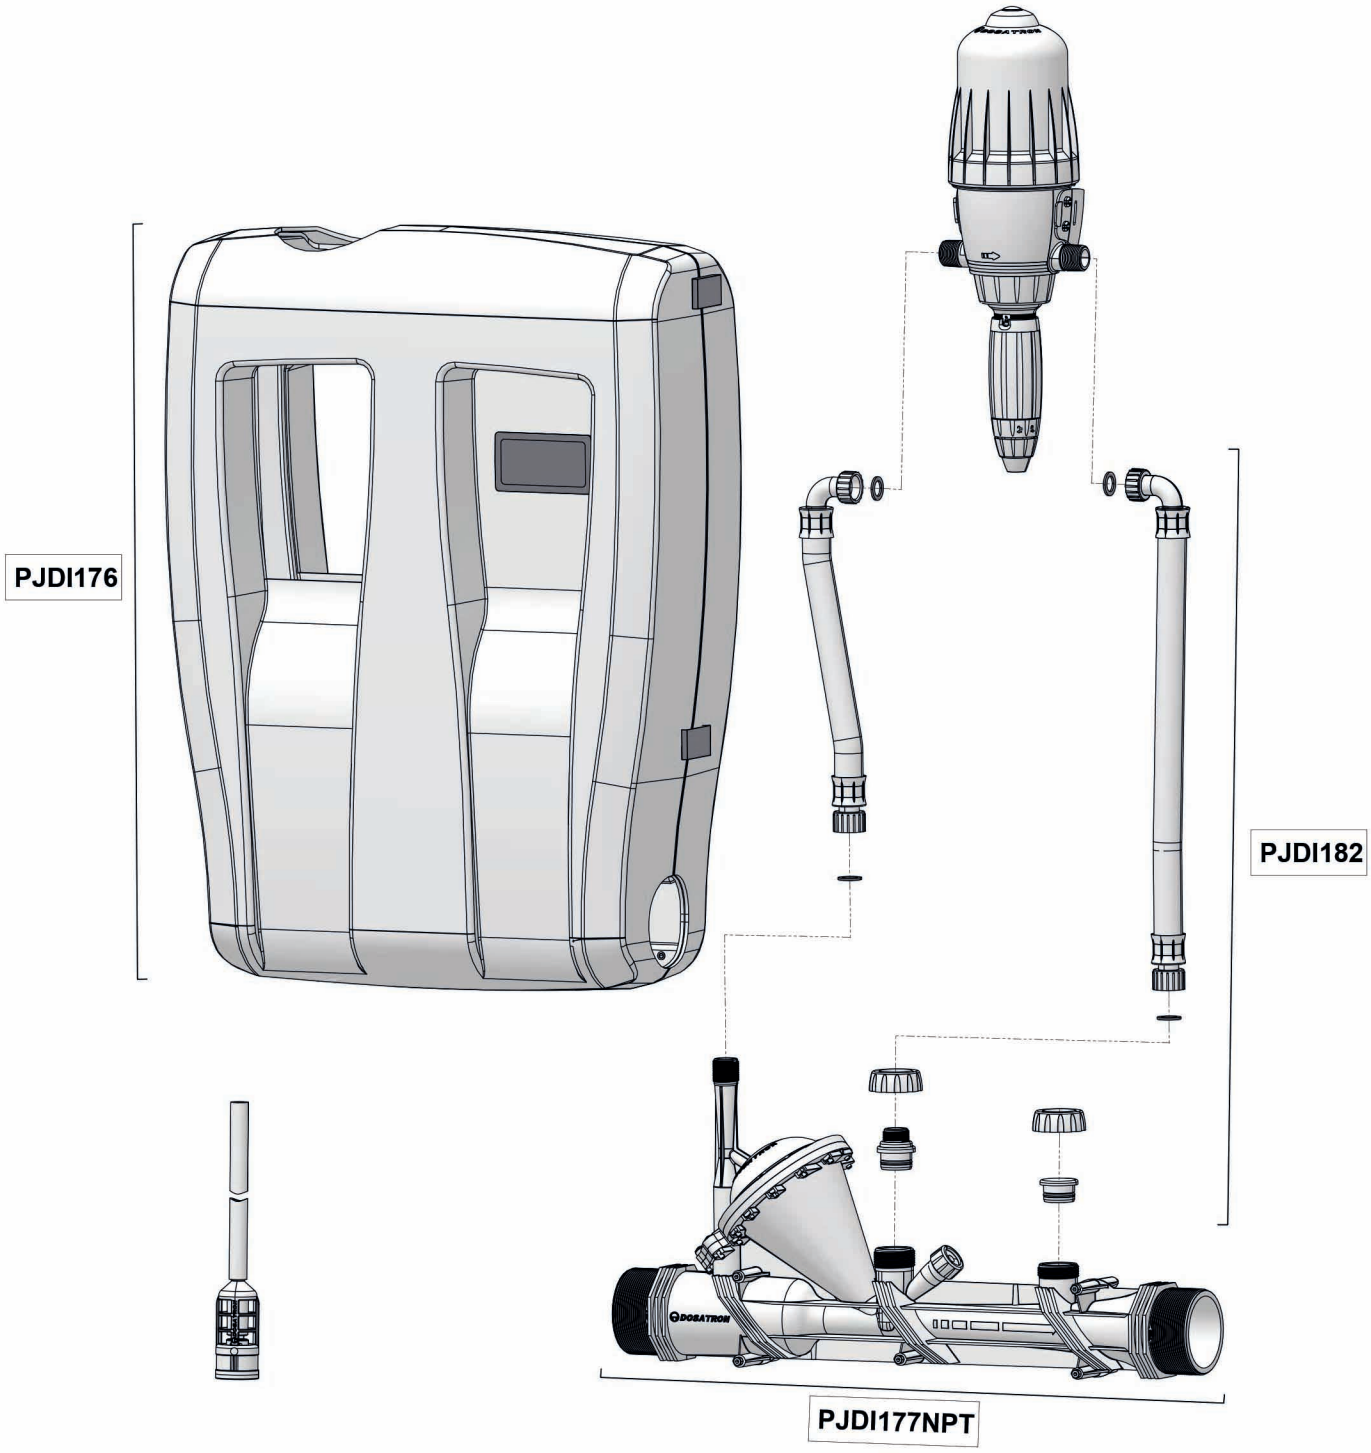

D132WL5000

132 GPM - 1:5000 - 1:500
0.02% - 0.2%
7 - 87 PSI
0.5 - 6 bar

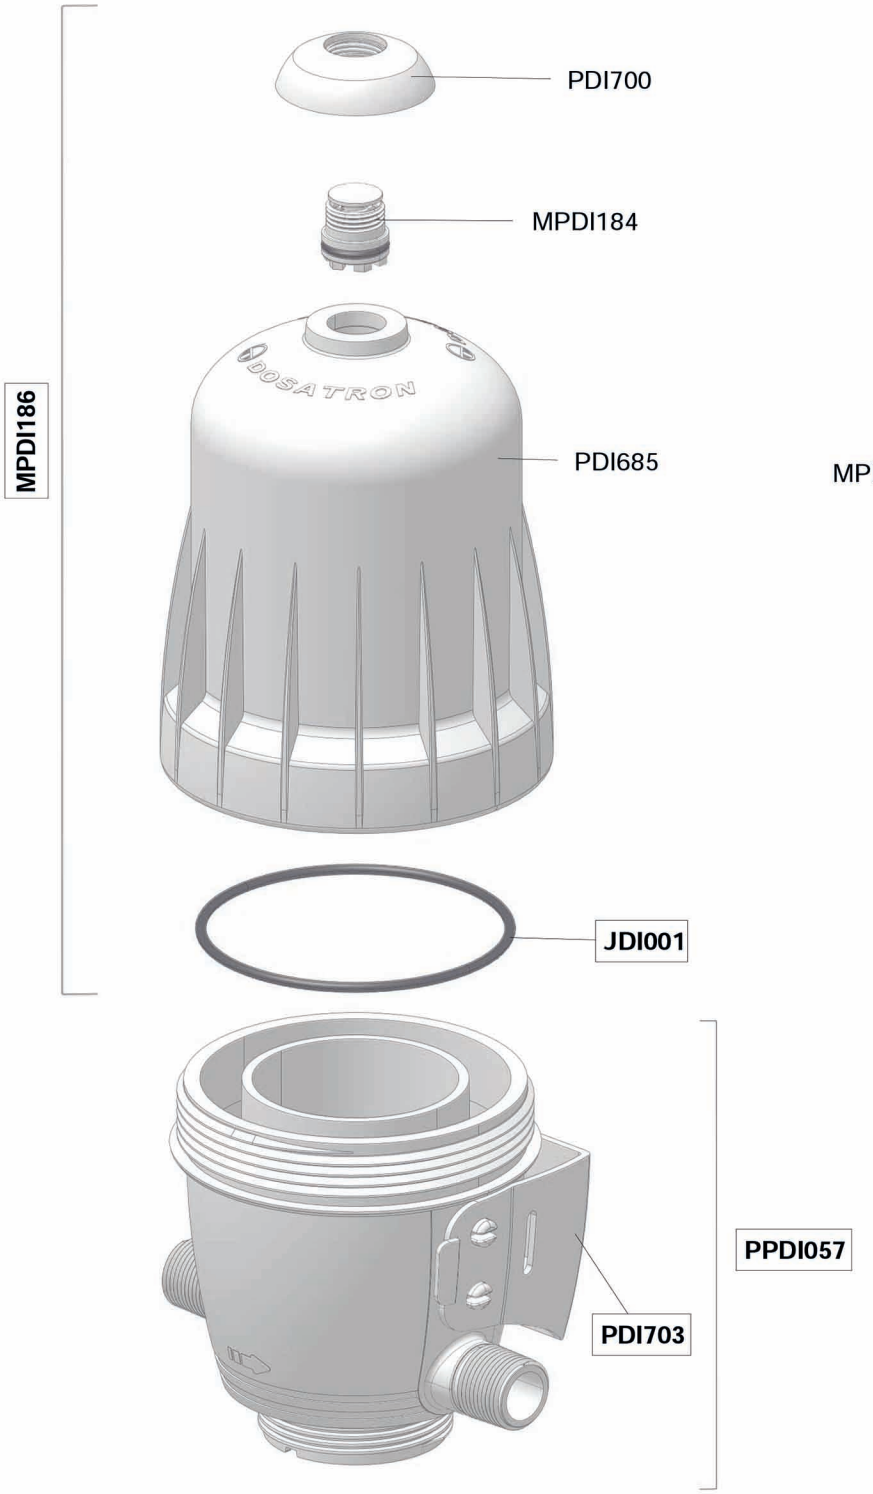

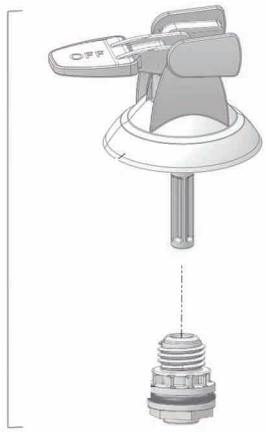

C

D132WL5000

132 GPM - 1:5000 - 1:500
0.02% - 0.2%
7 - 87 PSI
0.5 - 6 bar

PCDI030

PJDI114

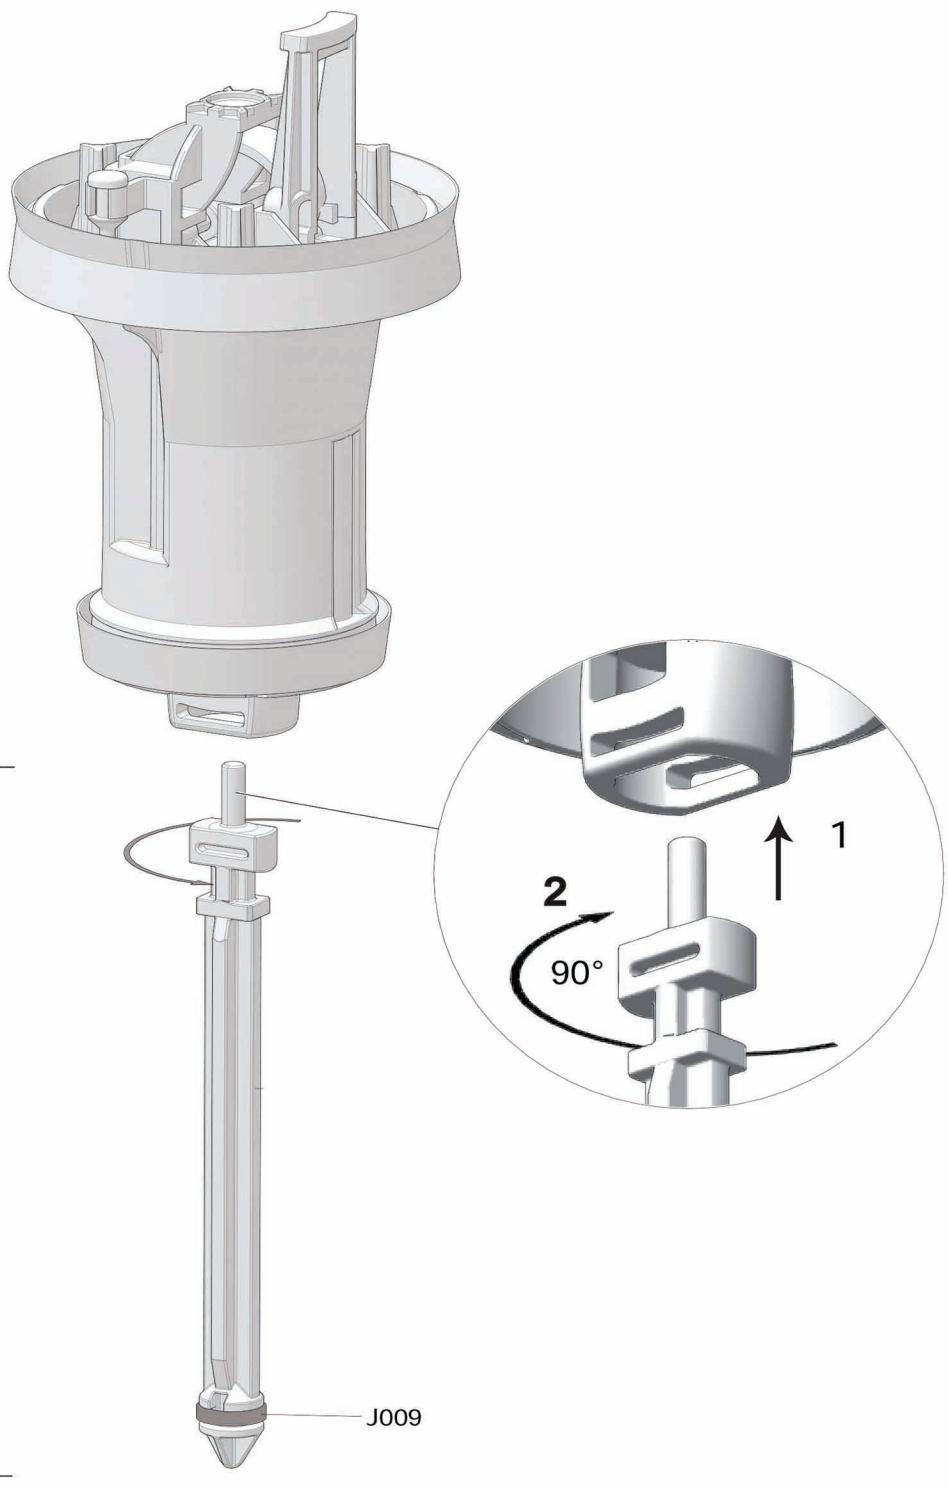

D132WL5000

132 GPM - 1:5000 - 1:500
0.02% - 0.2%
7 - 87 PSI
0.5 - 6 bar

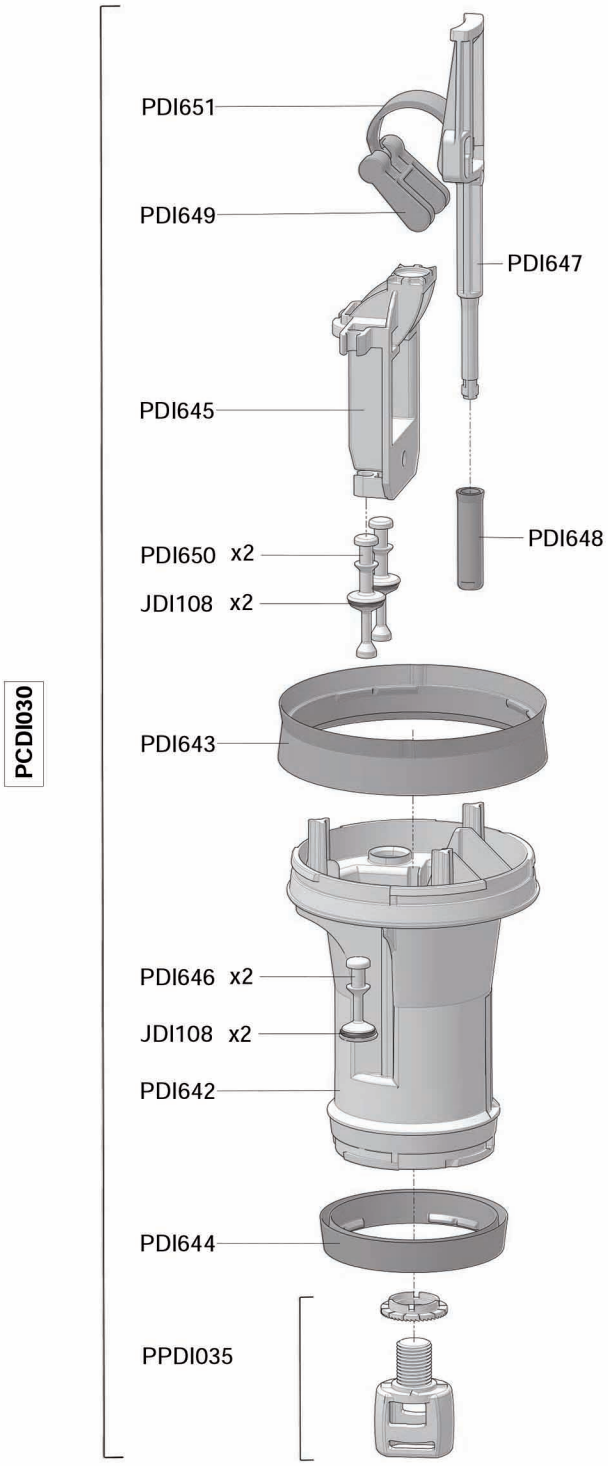

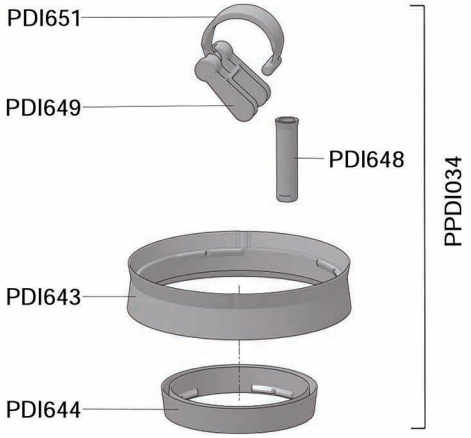

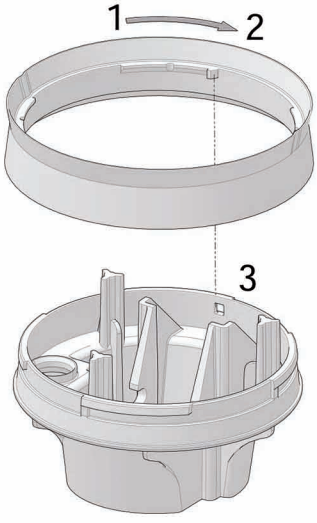

D132WL5000

132 GPM - 1:5000 - 1:500
0.02% - 0.2%
7 - 87 PSI
0.5 - 6 bar

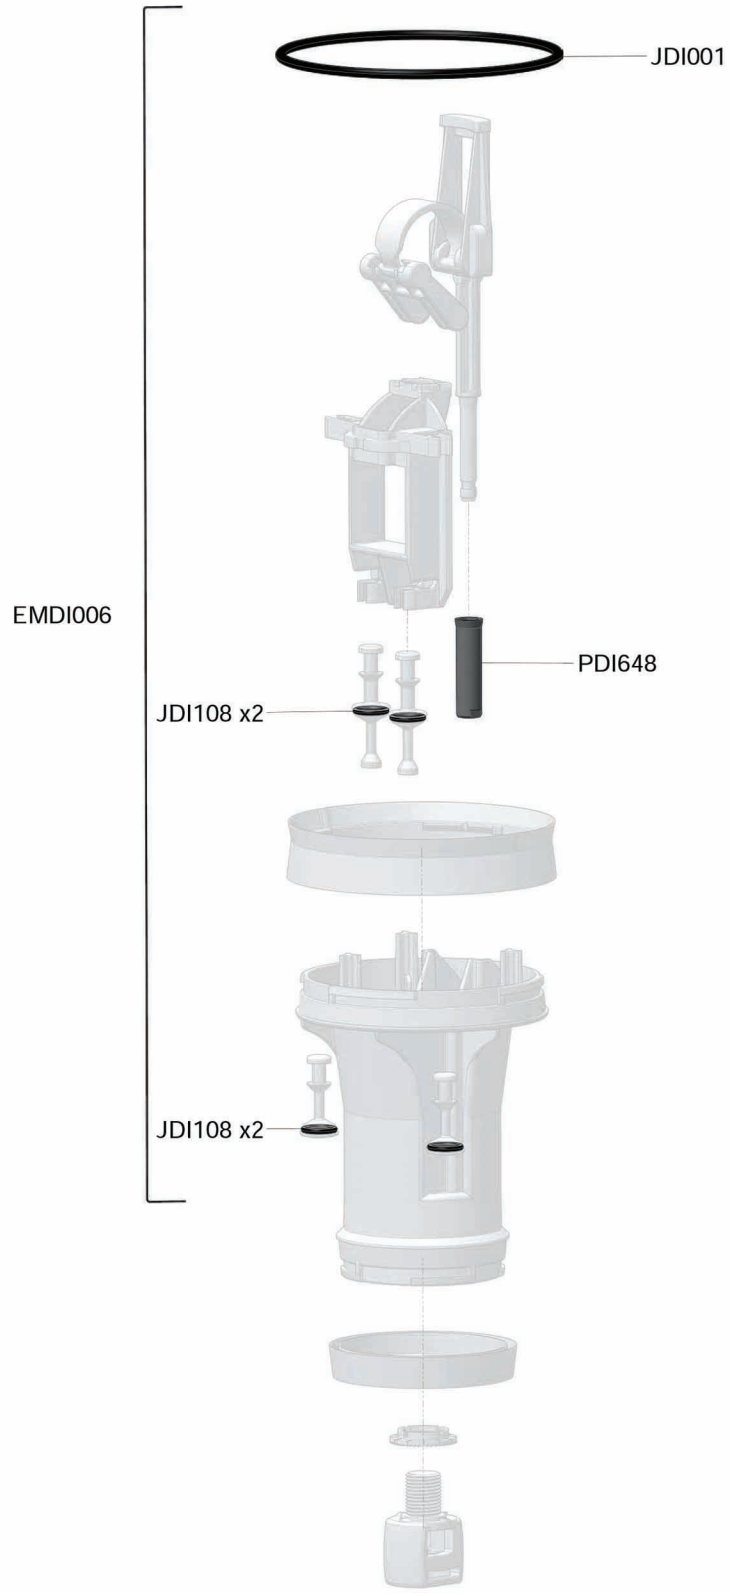

D132WL5000

132 GPM - 1:5000 - 1:500
0.02% - 0.2%
7 - 87 PSI
0.5 - 6 bar

CDDI086

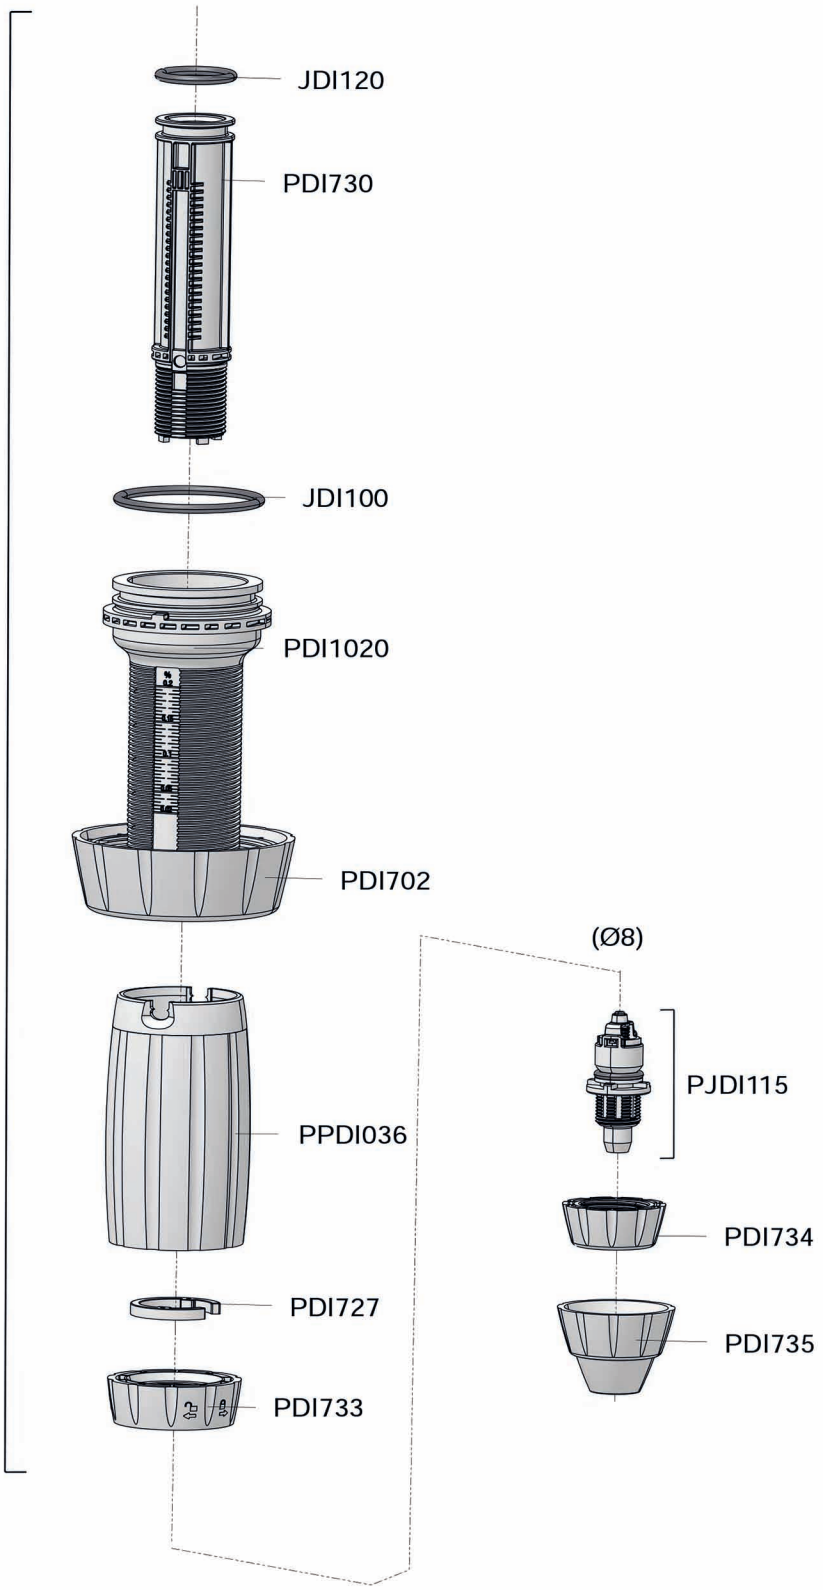

D132WL5000

132 GPM - 1:5000 - 1:500
0.02% - 0.2%
7 - 87 PSI
0.5 - 6 bar

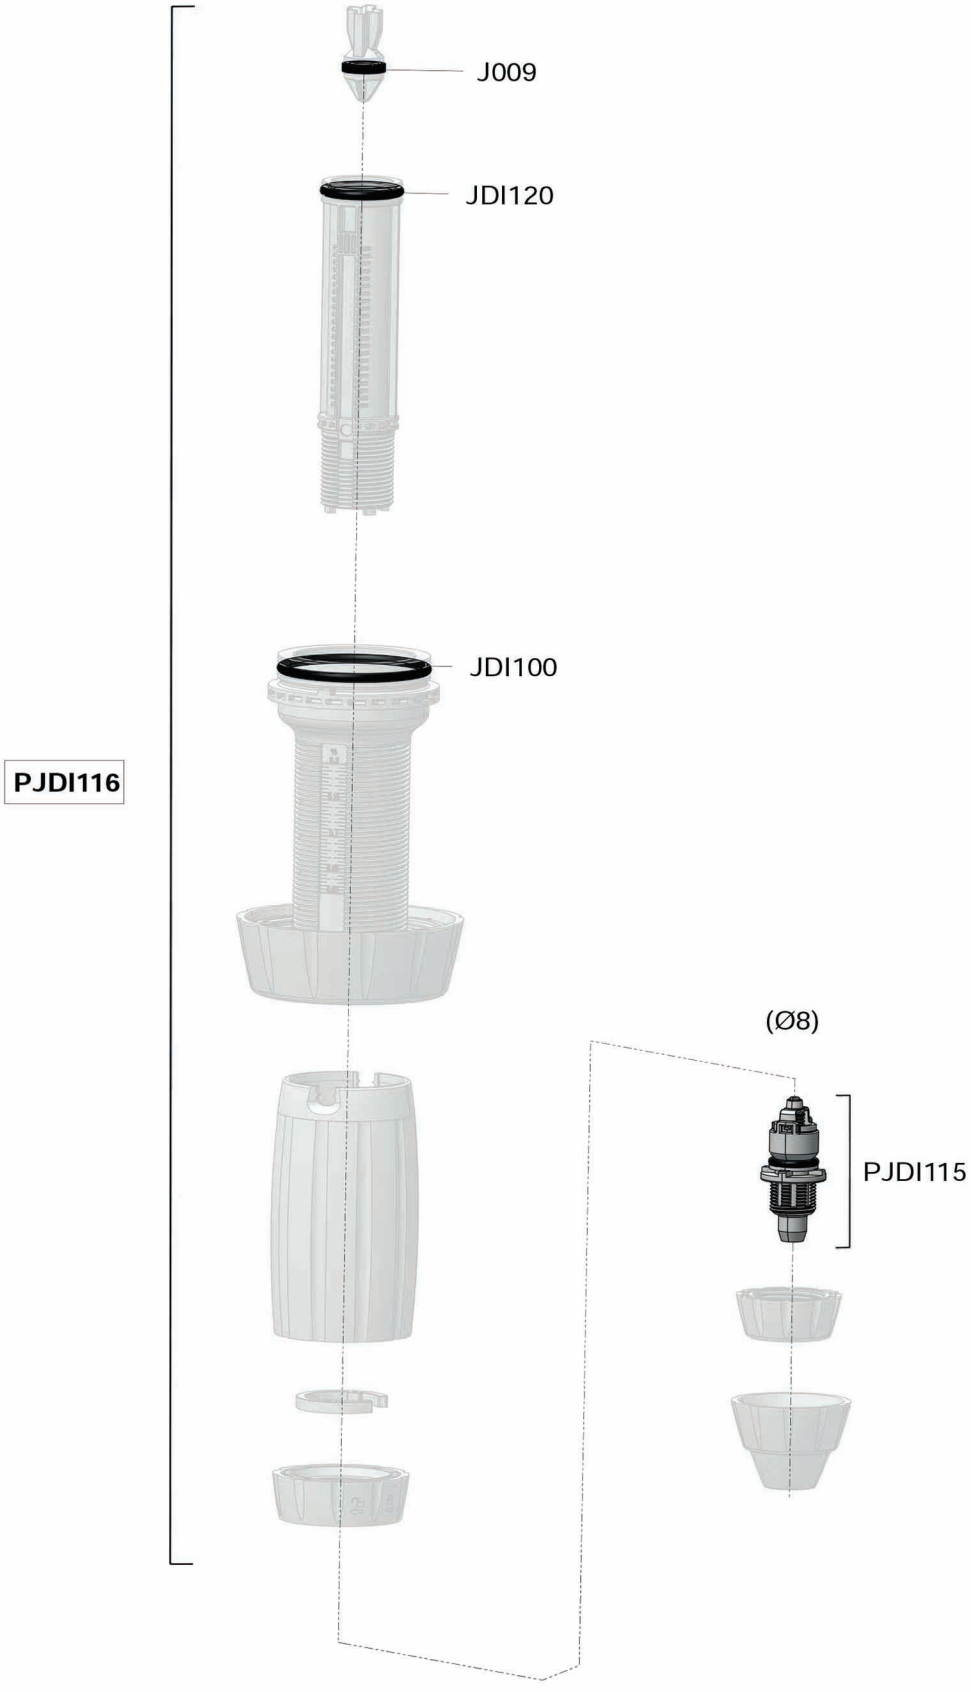

D132WL5000

132 GPM - 1:5000 - 1:500
0.02% - 0.2%
7 - 87 PSI
0.5 - 6 bar

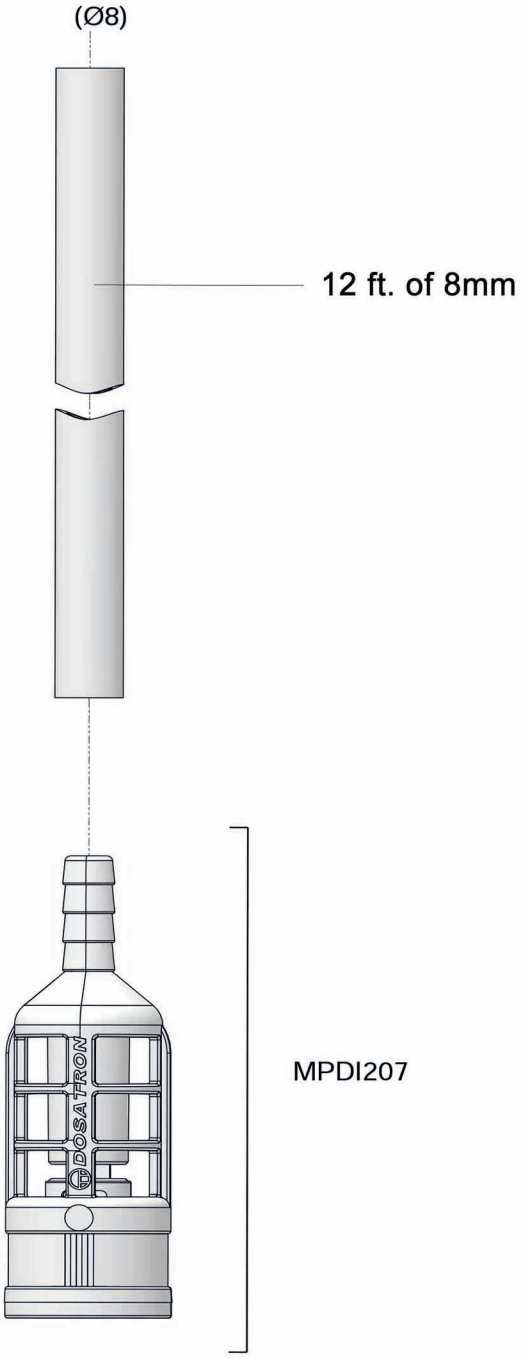

A