DOSATRON® WATER POWERED DOSING TECHNOLOGY

SCHEMATICS

Dosatron Liquid Dispenser

Model # D14WL3000NIEAF- 14 GPM

1:333 - 1:3000

7.3 - 85 PSI

Certified to NSF/ANSI 61 & 372

Suggested Installation:
200 mesh/80 micron water filter prior to unit
One-way check valve downstream from unit for water hammer protection

Suggested Maintenance Interval:
Replace injection seals every 12 months

DOSATRON SALES & SERVICE - NORTH & CENTRAL AMERICA

Dosatron International, Inc.
Phone: 727-443-5404 Service: (800) 523-8499
Fax: 727-447-0591
www.dosatronUSA.com

D14WL3000NIEAF

14 GPM - 1:3000 - 1:333

3m³/h - 0.03 - 0.3%

0.5 - 6 bar

7.3 - 85 psi

Certified to NSF/ANSI 61 & 372

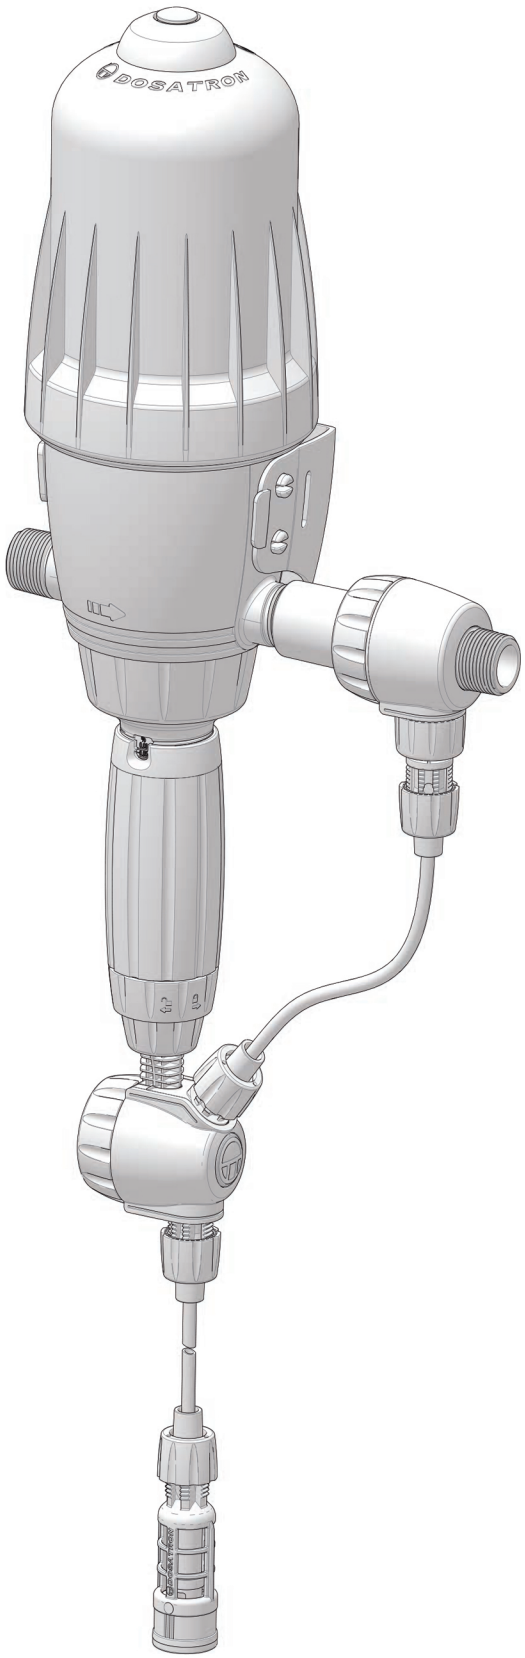

© DOSATRON INTERNATIONAL S.A.S. 2015
D14WL3000NIE/1015/D4

D14WL3000NIEAF

14 GPM - 1:3000 - 1:333

3m³/h - 0.03 - 0.3%

0.5 - 6 bar

7.3 - 85 psi

Certified to NSF/ANSI 61 & 372

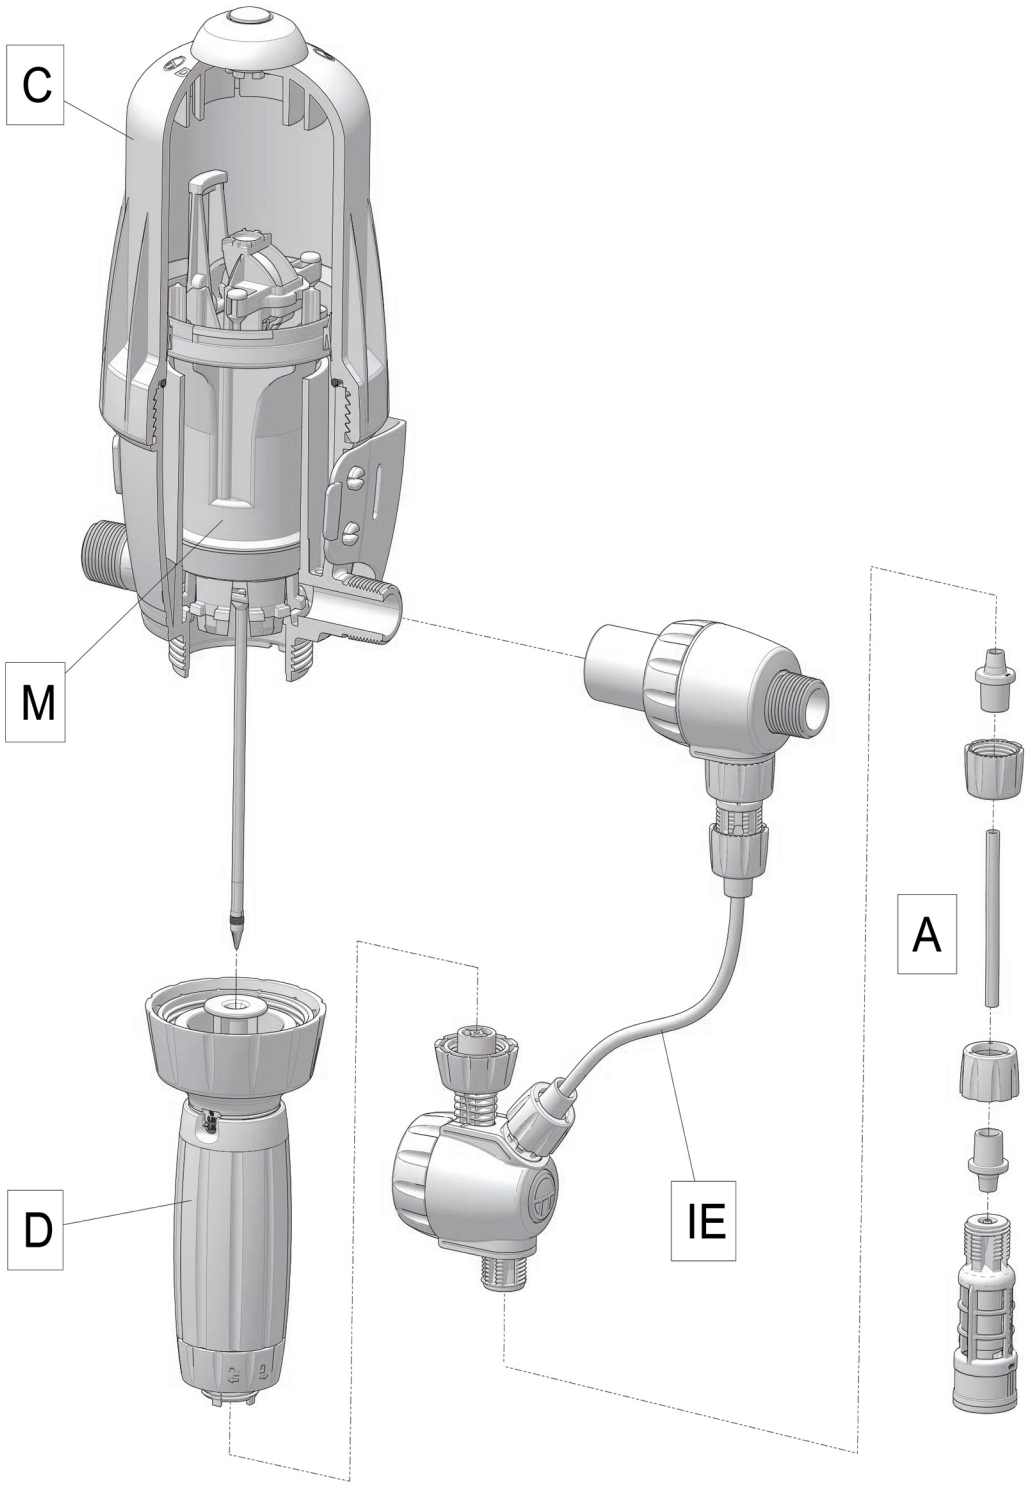

© DOSATRON INTERNATIONAL S.A.S. 2015
D14WL3000NIE/1015/D4

D14WL3000NIEAF

14 GPM - 1:3000 - 1:333
3m³/h - 0.03 - 0.3%
0.5 - 6 bar
7.3 - 85 psi

Certified to NSF/ANSI 61 & 372

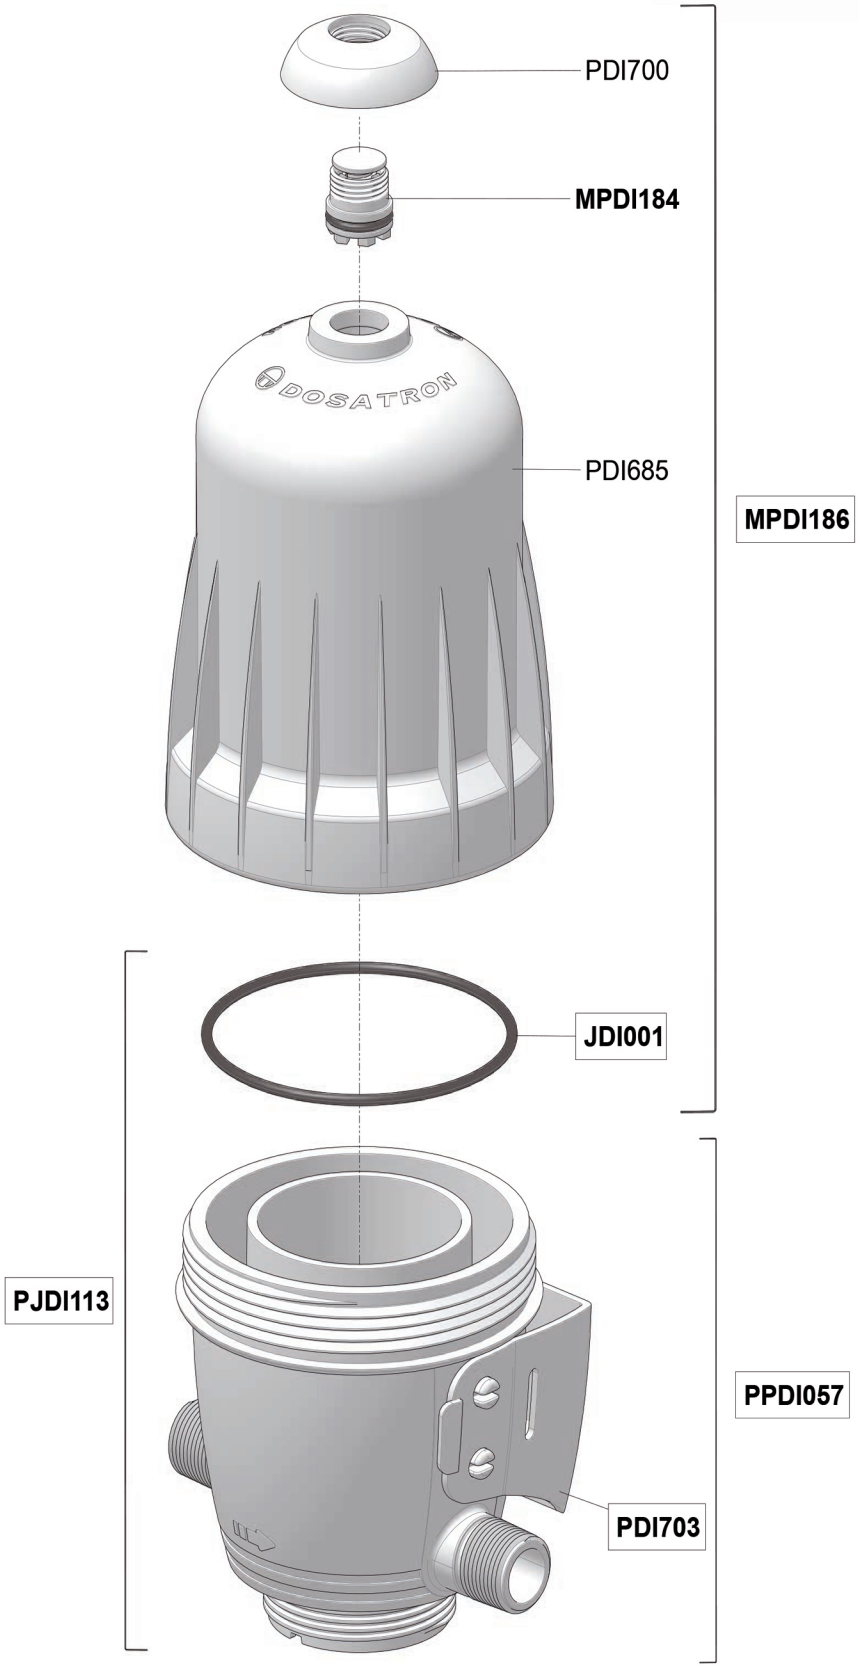

C

© DOSATRON INTERNATIONAL S.A.S. 2015
D14WL3000NIE/1015/D4

D14WL3000NIEAF

Certified to NSF/ANSI 61 & 372

14 GPM - 1:3000 - 1:333
3m³/h - 0.03 - 0.3%
0.5 - 6 bar
7.3 - 85 psi

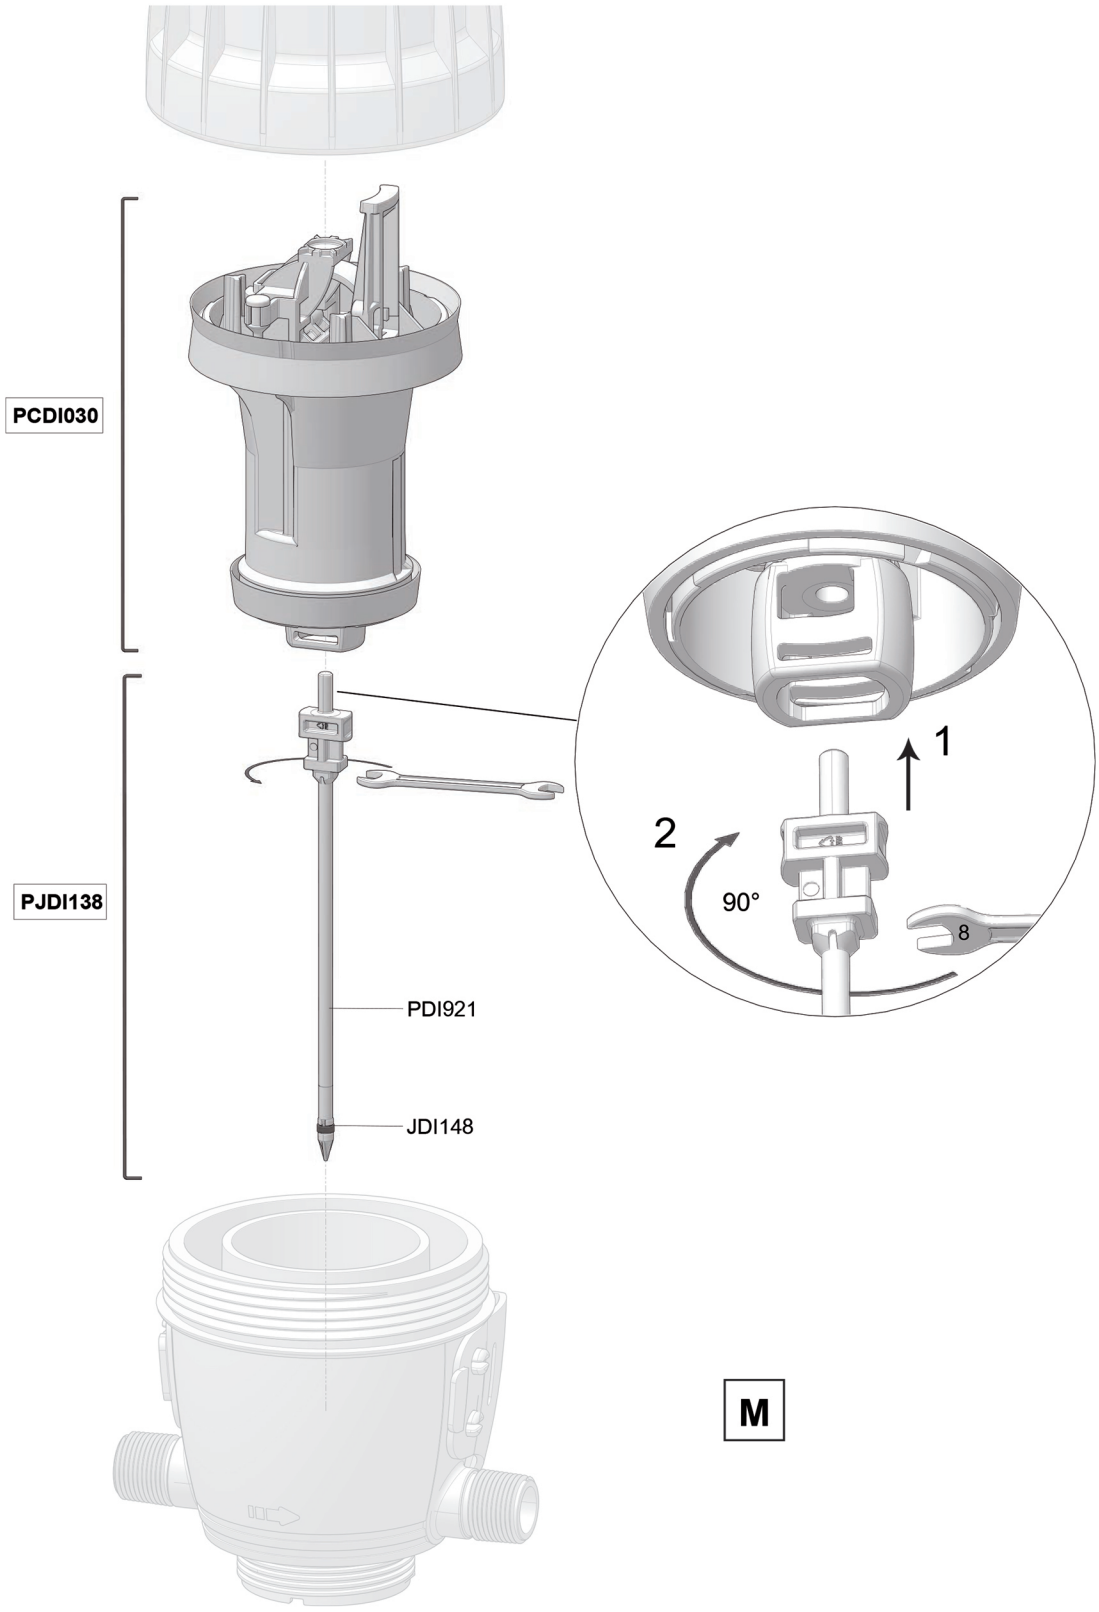

M

© DOSATRON INTERNATIONAL S.A.S. 2015
D14WL3000NIE/1015/D4

D14WL3000NIEAF

Certified to NSF/ANSI 61 & 372

14 GPM - 1:3000 - 1:333
3m³/h - 0.03 - 0.3%
0.5 - 6 bar
7.3 - 85 psi

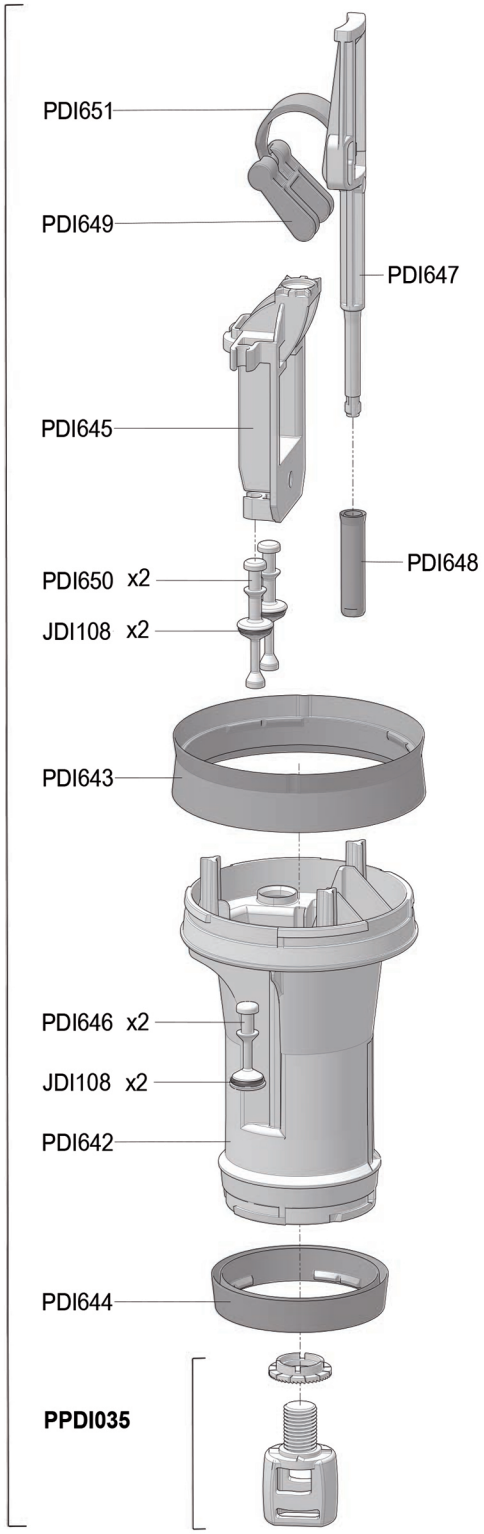

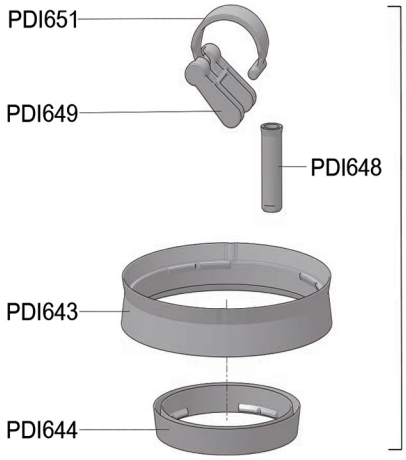

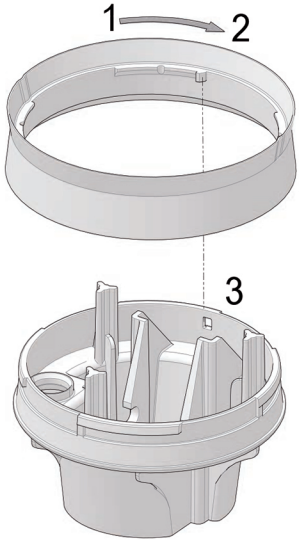

M

© DOSATRON INTERNATIONAL S.A.S. 2015
D14WL3000NIE/1015/D4

D14WL3000NIEAF

Certified to NSF/ANSI 61 & 372

14 GPM - 1:3000 - 1:333

3m³/h - 0.03 - 0.3%

0.5 - 6 bar

7.3 - 85 psi

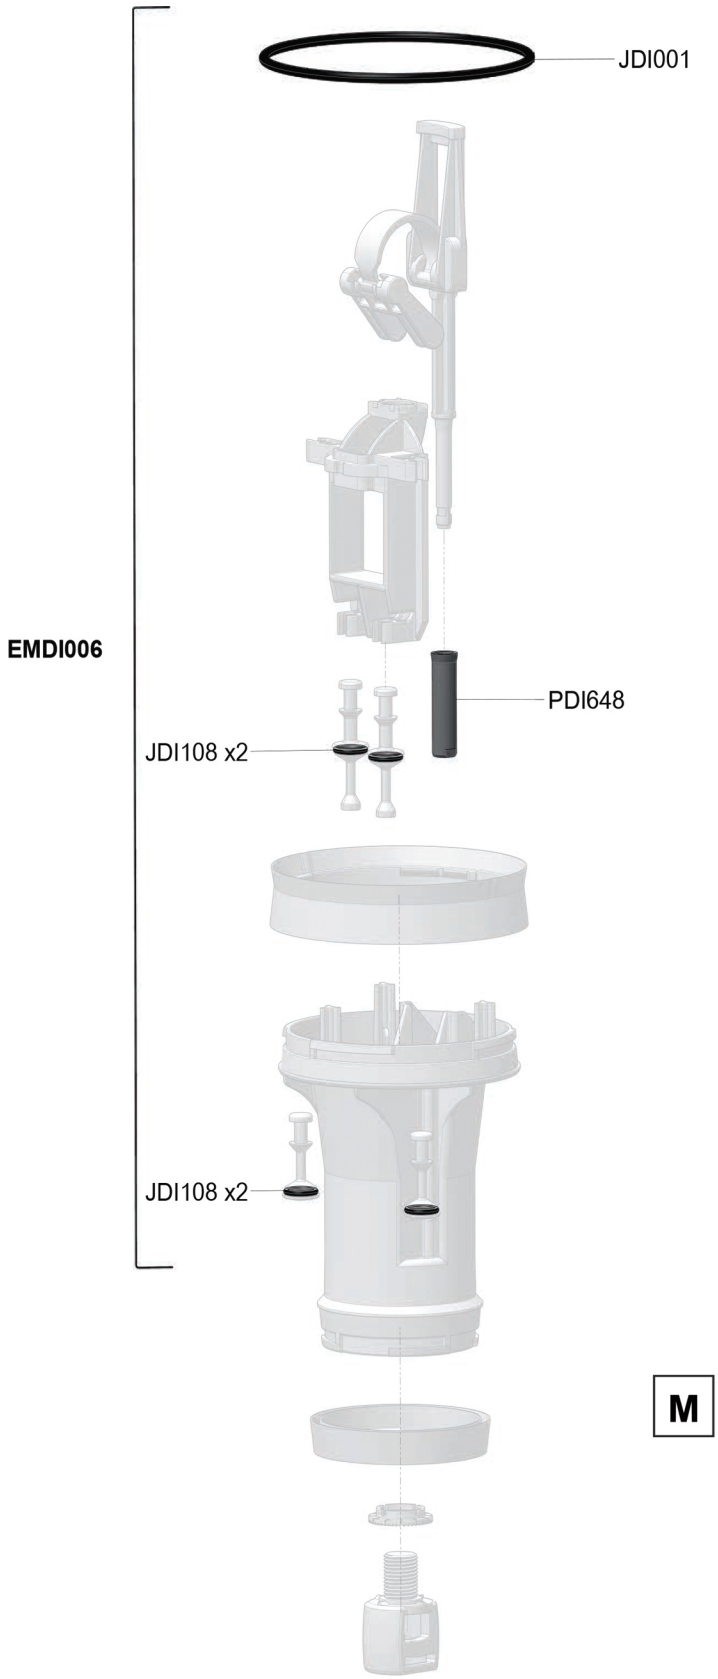

© DOSATRON INTERNATIONAL S.A.S. 2015
D14WL3000NIE/1015/D4

D14WL3000NIEAF

Certified to NSF/ANSI 61 & 372

14 GPM - 1:3000 - 1:333

3m³/h - 0.03 - 0.3%

0.5 - 6 bar

7.3 - 85 psi

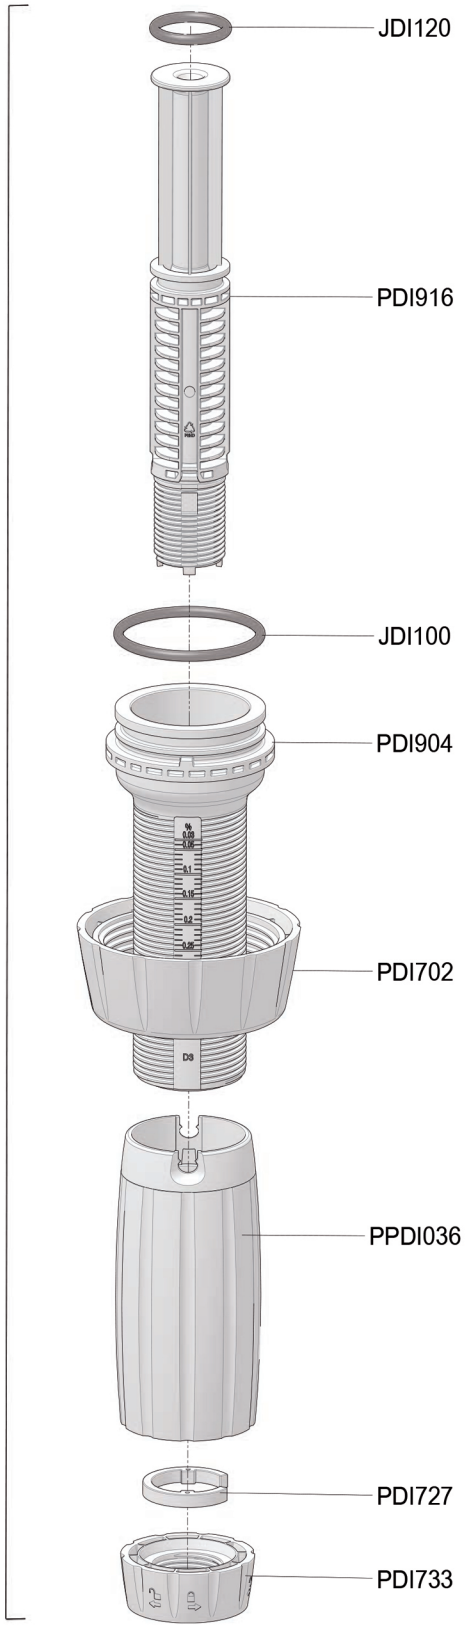

CDDI088

D

© DOSATRON INTERNATIONAL S.A.S. 2015
D14WL3000NIE/1015/D4

D14WL3000NIEAF

14 GPM - 1:3000 - 1:333
3m³/h - 0.03 - 0.3%
0.5 - 6 bar
7.3 - 85 psi

Certified to NSF/ANSI 61 & 372

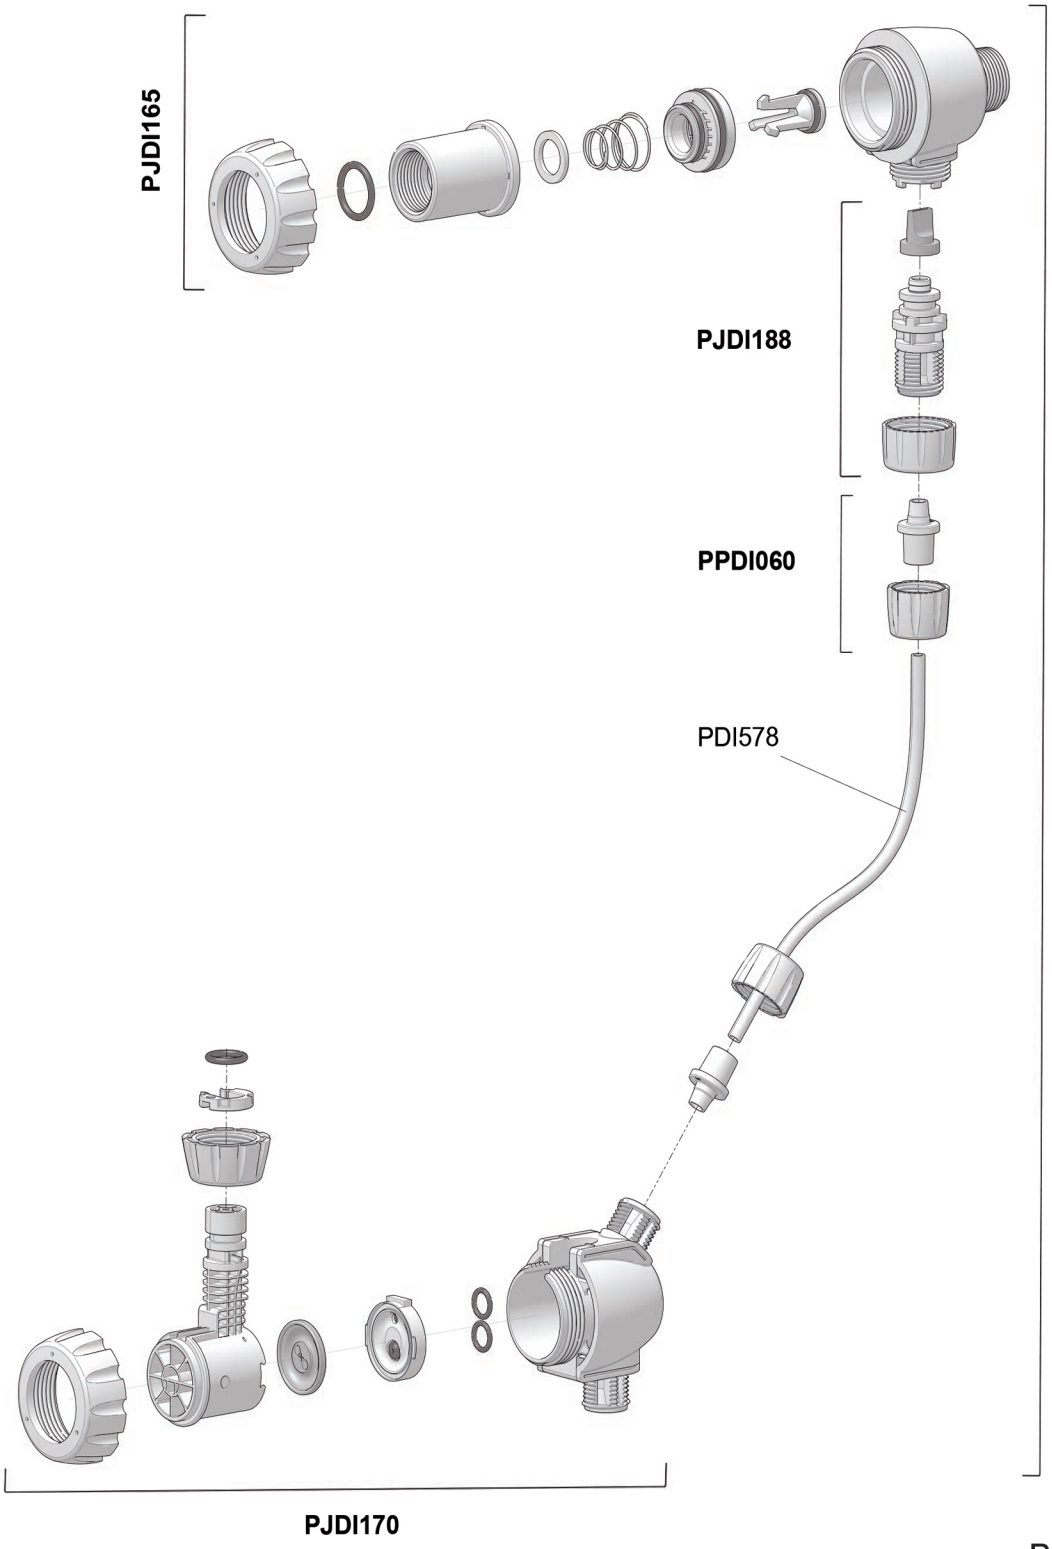

IE

© DOSATRON INTERNATIONAL S.A.S. 2015
D14WL3000NIE/1015/D4

D14WL3000NIEAF

Certified to NSF/ANSI 61 & 372

14 GPM - 1:3000 - 1:333
3m³/h - 0.03 - 0.3%
0.5 - 6 bar
7.3 - 85 psi

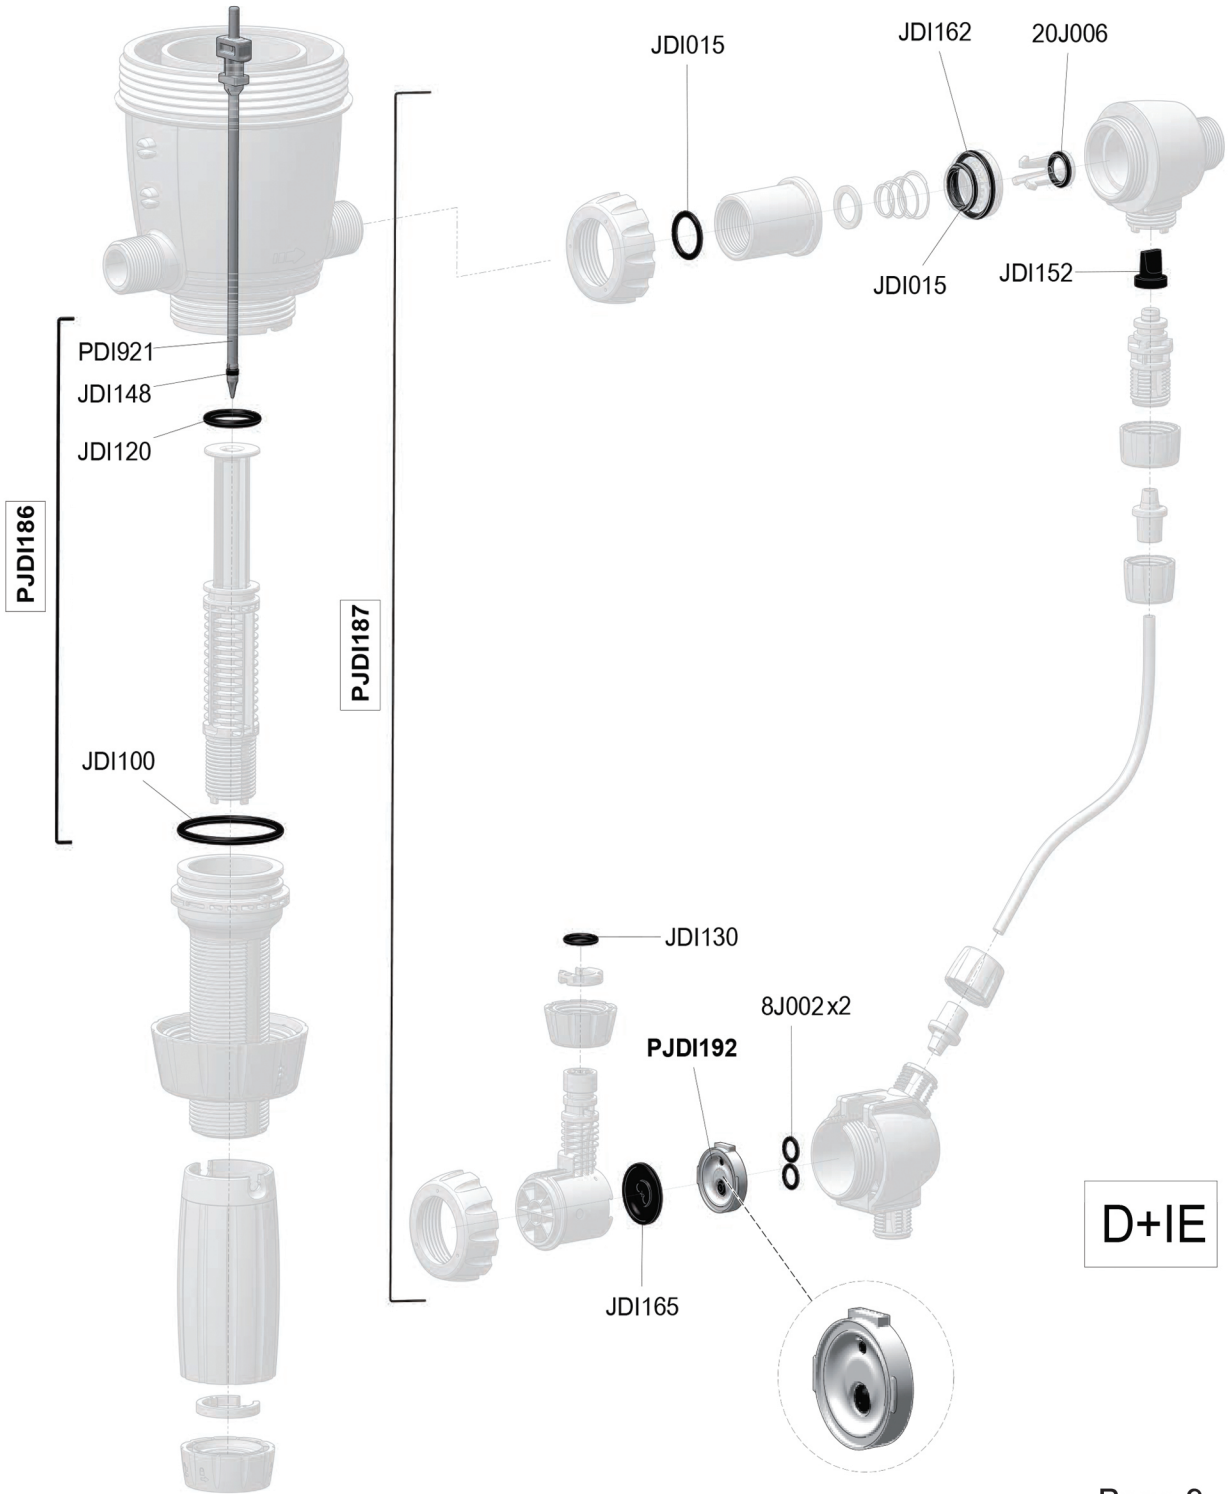

© DOSATRON INTERNATIONAL S.A.S. 2015
D14WL3000NIE/1015/D4

D14WL3000NIEAF

Certified to NSF/ANSI 61 & 372

14 GPM - 1:3000 - 1:333
3m³/h - 0.03 - 0.3%
0.5 - 6 bar
7.3 - 85 psi

(Ø4)

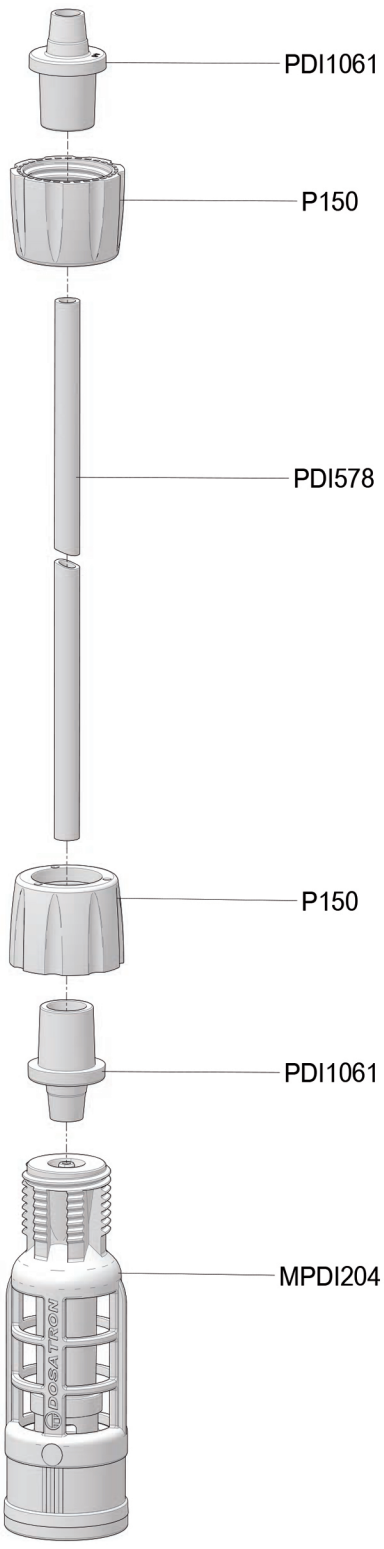

MPDI205

A

© DOSATRON INTERNATIONAL S.A.S. 2015
D14WL3000NIE/1015/D4