




DOSATRON®

WATER POWERED DOSING TECHNOLOGY

40 GPM: D8RE3000


Product Specifications

Call 800-523-8499 to order the Dosatron for your specific application

Dilution Range:	1:3000 to 1:800 (0.03% to 0.125%)
Water Flow Range:	2.2 to 40 GPM
Operating Pressure Range:	2.2 to 116 PSI
Available Housing Materials:	Polypropylene (Standard Blue)
Dimensions:	25 1/4" x 8 1/2"
Weight:	12 lbs
Connection Size:	1 1/2" NPT
Maximum Temperature:	104° F
Included Accessories:	6 ft clear suction tube, weighted strainer, mounting bracket and operating manual
Recommended Accessories:	200 mesh filter, check valve.
Optional Accessories:	Bypass, part #: MPDI196 



Basic Installation

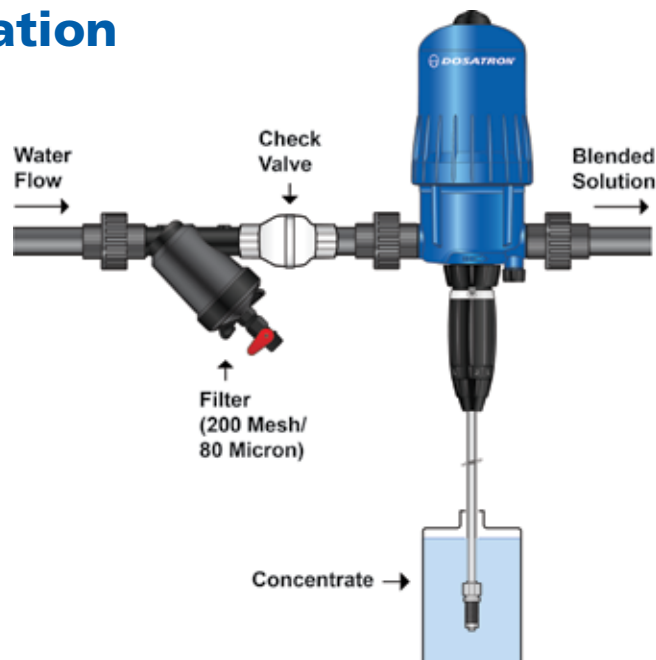

Dosatron International
2090 Sunnydale Blvd. • Clearwater, FL, USA
800-523-8499 • www.dosatronusa.com

Dosatron International, Inc. is an industry leader in water-powered, proportional chemical injectors. Dosatron products are manufactured according to ISO 9001:2000 and ISO 14001:2004 standards.