For quick priming (helpful at low water flows):

- Shut off outlet ball valve
- Insert injection hose into the chemical container
- Turn on the stainless steel ball valve (collect discharged solution or send it to drain)
- Observe the injection hose. When full, count 10 clicks
- Shut off stainless steel ball valve
- Turn outlet ball valve on

For sample collection:

- Make sure the unit is primed
- Shut off outlet ball valve
- Turn stainless steel ball valve on
- In a clean container, collect 2.5 gallons of diluted solution
- Shut off stainless steel ball valve
- Collect sample out of the 2.5 gallons and check concentration
- Turn on the outlet valve



2090 Sunnydale Blvd. ● Clearwater, FL 33765 1-727-451-1198 ● 1-800-451-6628 ● www.dilutionsolutions.com www.dosatronusa.com



ASSEMBLY INSTRUCTIONS

IPK34 - 3 GPM

Industrial Plumbing Kit

For units: D07RE125, D07RE5




Dosatron unit sold separately.

Customer Service and Technical Support

1-800-451-6628

- Wrap all male fittings with eight (8) turns of Teflon[®] tape if white, only four (4) turns if thicker pink tape.
- Install the following with their arrows pointing in the same direction as the flow:
 - Check valve
 - Filter
 - Pressure regulator
- Attach instruction card to injector.

IPK34 - 3 GPM includes:	
2	3/4" polypropylene Banjo single union ball valve
1	1/2" stainless steel ball valve
1	3/4" polypropylene 200 mesh tee filter
1	3/4" pressure regulator w/gauge
1	3/4" 3 GPM flow restrictor
1	3/4" polypropylene check valve
2	3/4" union schedule 80 PVC
7	3/4" x 2" Banjo polypropylene fittings
1	1/2" x 2" Banjo polypropylene fittings
1	1/2" x 1/2" Banjo barb fitting
1	3/4" male to 1/2" female Banjo reducer bushing
1	3/4" Banjo T
3	3/4" Banjo street elbows
1	Roll of Teflon [®] tape
1	Instructions card

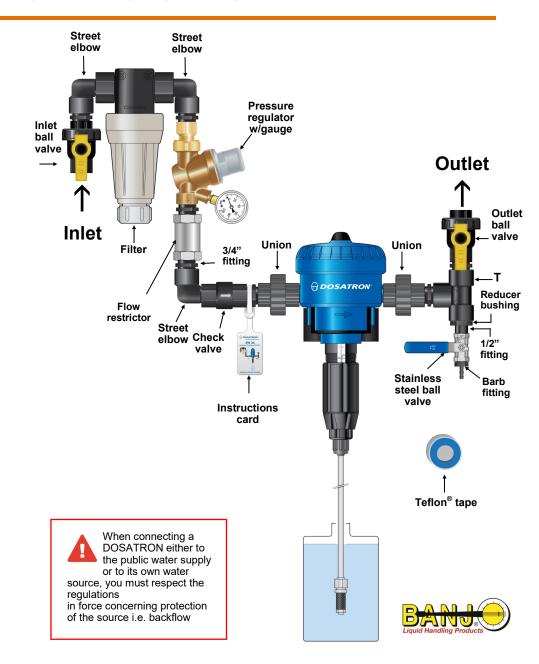

NOTE: Installation illustration is to be used as a reference guide only.